


ELECTRICAL SPECIFICATIONS

Model Type	TO39, F11, SM02, SM03	SM04	SM06
Frequency Range	115MHz ~ 950MHz	250MHz ~ 950MHz	315MHz ~ 950MHz
Frequency Tolerance @25°C	±75KHz, ±150KHz		
Operating Temperature Range	-20°C ~ +70°C		
Storage Temperature Range	-40°C ~ +85°C		
DC Insulation Resistance Between Any Two Pins	1.0MΩ		
CW RF Power Dissipation	0dB		
Frequency Temperature Coefficient	0.032ppm		
Aging @25°C	±10ppm / year		

DIMENSIONS

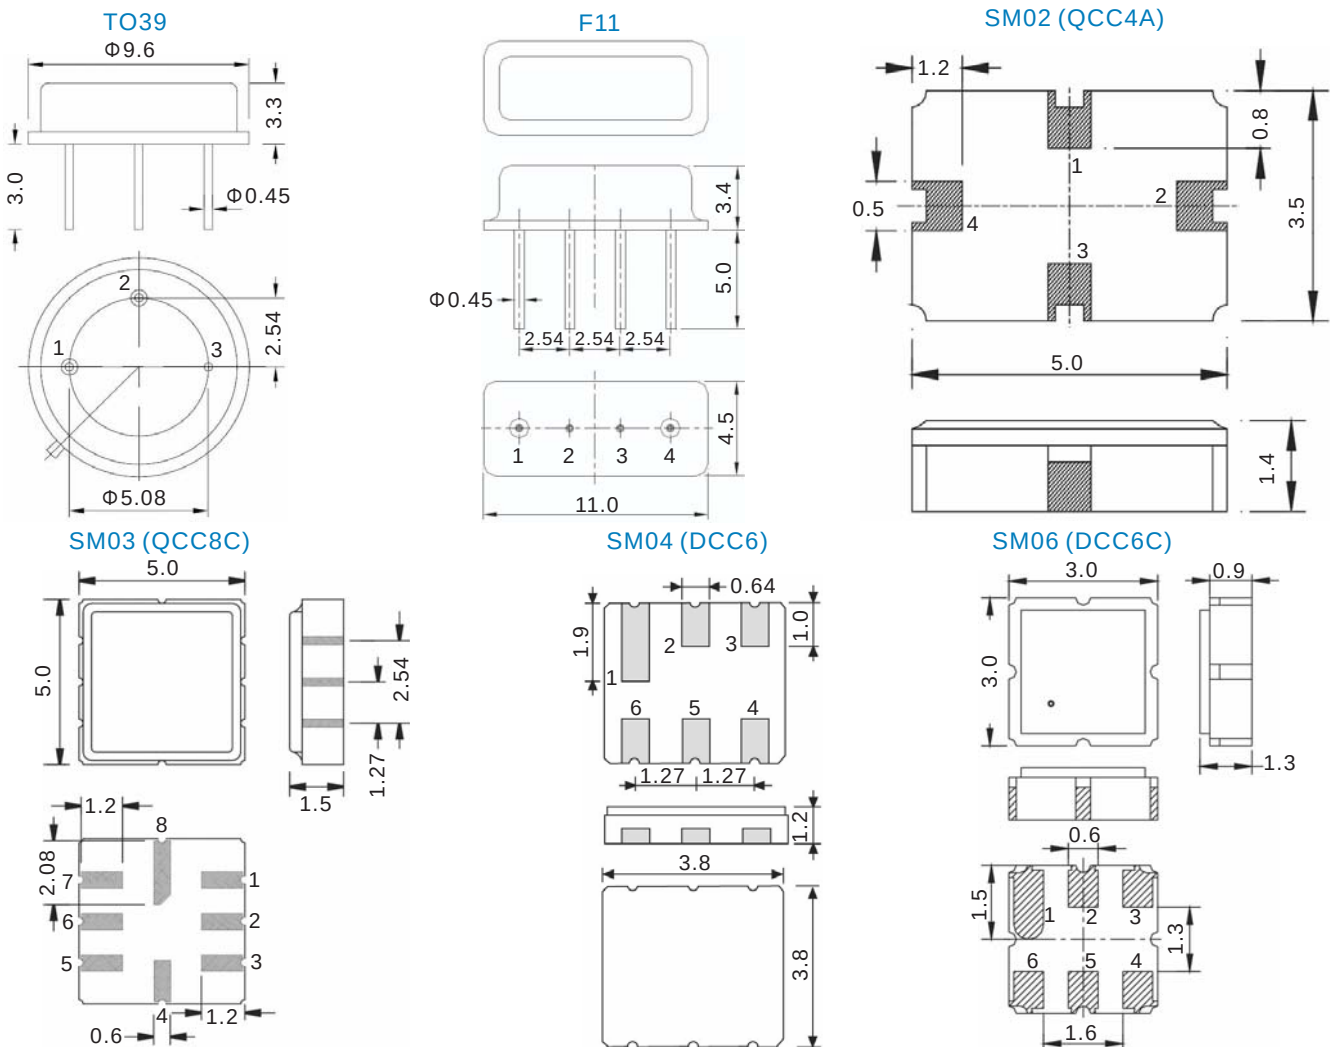

Model	1	2	3	4	5	6	7	8
TO39	Input/Output	Output/Input	GND					
F11	Input/Output	GND	GND	Input/Output				
SM02	Input/Output	GND	Output/Input	GND				
SM03	NC	Input/Output	NC	GND	NC	Input/Output	NC	GND
SM04	GND	Input/Output	GND	GND	Output/Input	GND		
SM06	GND	Input/Output	GND	GND	Output/Input	GND		

PART NUMBER

GMK-SRTO39-	433.92	-	75
SRF11-	Frequency		Frequency
SRSM02-	433.92MHz		Tolerance
SRSM03-			±75KHz
SRSM04-			
SRSM06-			