

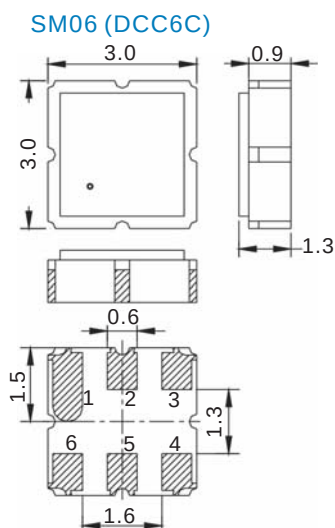
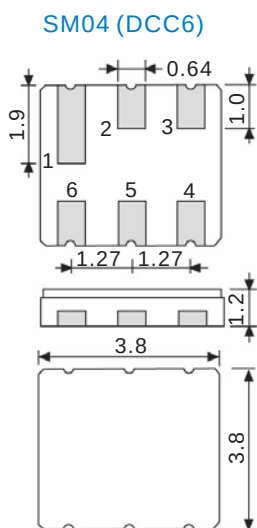
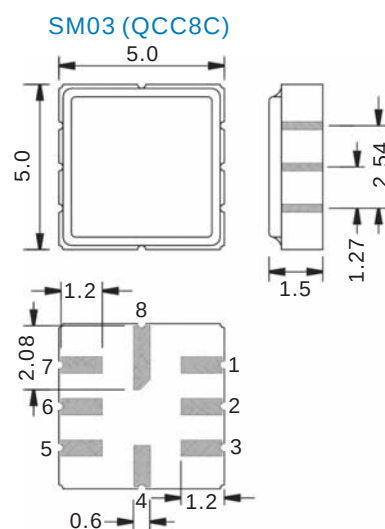


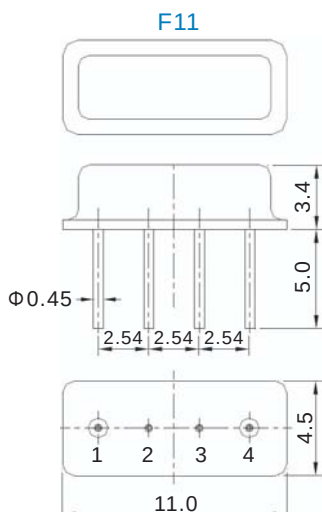

ELECTRICAL SPECIFICATIONS

Model Type	F11	TO39	SM03	SM04, SM06
Frequency Range	115MHz ~ 950MHz		115MHz ~ 1650MHz	250MHz ~ 950MHz
Insertion Loss	3.0 ~4.5dB	3.0 ~5.0dB		
3dB Band Width	300KHz ~ 16MHz			
Operating Temperature Range	-20℃ ~ +70℃			
DC Insulation Resistance Between Any Two Pins	1.0MΩ			
CW RF Power Dissipation	10dB			
Frequency Temperature Coefficient	0.032ppm			
Aging @25℃	±10ppm / year			
Storage Temperature Range	-40℃ ~ +85℃			

DIMENSIONS

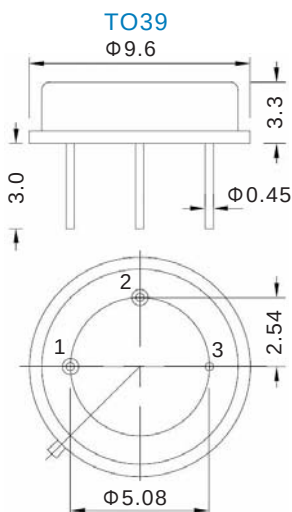

PART NUMBER

GMK-SFTO39- **433.92**
 SFF11-
 SF5M03-
 SF5M04-
 SF5M06-

Frequency
433.92MHz

Model	1	2	3	4	5	6	7	8
TO39	Input/Output	Output/Input	GND					
F11	Input/Output	GND	GND	Input/Output				
SM03	NC	Input/Output	NC	GND	NC	Input/Output	NC	GND
SM04	GND	Input/Output	GND	GND	Output/Input	GND		
SM06	GND	Input/Output	GND	GND	Output/Input	GND		